Merrychef

# Microcook HD1025

Project _____

Item _____

Quantity _____

CSI Section 11400 _____

Approval _____

Date _____

Microcook HD1025

## Models

☑ HD1025

## Standard Features

- 1025 Watts power output (IEC 705 Rating)
- Ergonomic digital touch pad control and easy to clean interior cavity.
- Full access to the oven cavity with the space saving, removable lift up door.
- Fully programmable, with up to 10 programs.
- User friendly operation.
- Energy saving stand-by mode.

## Options & Accessories

## Specifications

A fully commercial heavy duty, stainless steel 1025 Watt microwave oven equipped with the unique lift-up door.
Ideally suited for individual portions or small batch cooking.

- In-built diagnostics – easy to use fault finding card.
- Vending model available.
- Quality assured BS EN ISO 9001 accreditation.

CE

Station Road West
Ash Vale, Aldershot
Hampshire GU12 5XA
United Kingdom

Tel: +44 (0)1252 371000
Fax: +44(0)1252 371007
E-mail: info@merrychef.com

www.merrychef.com

Datasheet Part No.
32Z3371 Issue 4

Printed in the UK ©Merrychef Ltd.

Enodis

Merrychef

# Microcook HD1025

Model Specification

Allow a minimum of 50mm clearance to sides, top and rear to allow air to circulate freely

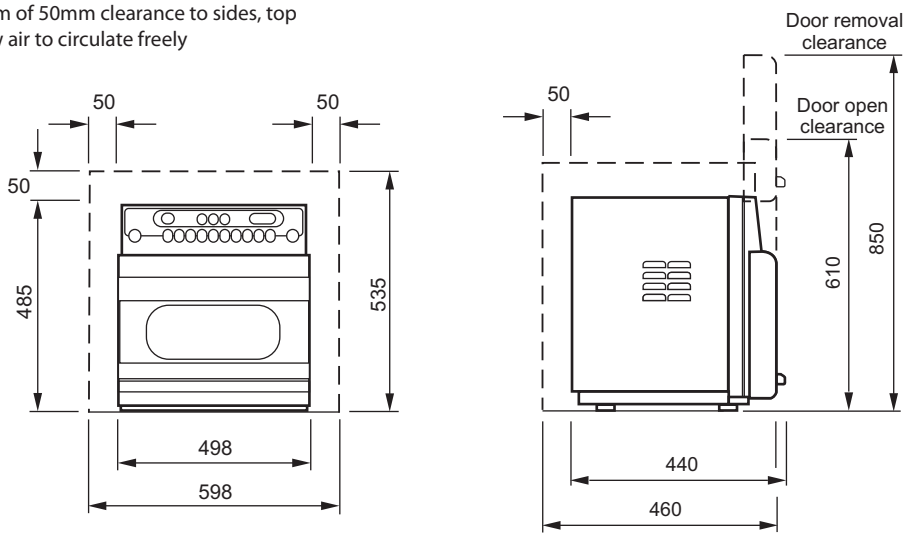


All dimensions in mm

## DIMENSIONS

| MODEL NO. | OVERALL SIZE mm | | | NET WEIGHT |
|---|---|---|---|---|
| | HEIGHT | WIDTH | DEPTH | |
| HD1025 | 485mm | 498mm | 440mm | 40.0kg Nett<br>44.5kg Gross |

Capacity 28.5 litres
Internal Dimensions mm ( HxWxD ) 200 x 390 x 365

## POWER REQUIREMENTS

Power input 1.75kW maximum

| ELECTRICAL SUPPLY | | | |
|---|---|---|---|
| Country | Voltage/Freq. | Arrangement | Connections Used |
| UK | 230-240V 50Hz | Single Phase | 1P N & E |
| EU | 220-230V 50Hz | Single Phase | 1P N & E |

Moulded 13 Amp plug BS 1363A (UK only)

For oven models suitable for a 60Hz electrical supply, please contact the sales office.

## MICROWAVE POWER

Output 1025 Watts (IEC705) @ 100%
Power Levels 100%, 50% & Defrost
Safety System Agency approved monitored interlock door system.

## SAFETY FEATURES

Microwave safety interlocks on doors
Cavity overheat sensor
Automatic lock-out on invalid time setting
Magnetron overheat sensors

## TECHNICAL SPECIFICATIONS

| | |
|---|---|
| Magnetrons | One |
| Safety interlocks | Three |
| Distribution system | Rotating Passive Antenna x2 |
| Timer | Up to 9minutes 59seconds<br>Up to 3x 9min 59secs with multi-stage programmes |
| Timer controls | Digital touch pad control |
| User interface | Built-in diagnostic messages<br>Digital LED display of cooking time<br>Easy-to-use pre-programmed operation<br>10 programs |

## CONSTRUCTION

Cavity: 304 Stainless Steel
Casework: 430 Stainless Steel

## INSTALLATION INFORMATION

Away from major heat sources.
Place on a flat surface that is level, strong and stable.
Allow a minimum of 50mm clearance at the rear of the oven and to either side for air to circulate freely and at least 365mm above the front of the oven to enable the door to operate freely and to be removed for cleaning.
If circuit breakers are in use, ensure Type C units are fitted.

For further information on Merrychef products and services or advice on which machine suits you best please contact the Sales Office.

ASSOCIATE OF CEDA


**Station Road West,**
**Ash Vale, Aldershot**
**Hampshire GU12 5XA**
**United Kingdom**

**Tel: +44 (0)1252 371000**
**Fax: +44(0)1252 371007**
**E-mail: info@merrychef.com**

**www.merrychef.com**



**Datasheet Part No.**
**32Z3371 Issue 4**



**Printed in the UK ©Merrychef Ltd.**


Enodis


We reserve the right to change specifications appearing in this bulletin without incurring any obligation for equipment previously or subsequently sold.